

AGM

Holding the World's Insulation in Place

CAPACITOR DISCHARGE (CD) WELD PINS

Weld pins are used for attaching insulation to various metals, with the use of a CD welder. After the pin is welded in place, the insulation is Gpaled on the pin and secured with a self-locking washer.

Specifications

| Diameter "D" | Flange Diameter (Steel) "FD" | Flange Diameter (Aluminum) "FD" | Length "L" |
|-----------------|------------------------------------|---------------------------------------|---------------|
| 12 ga (.106) | .180 | .235 | As Required |
| 10 ga (.135) | .218 | .255 | As Required |


Material

- Mild Steel, with Copper Coating
- Stainless Steel Type 302HG (Type 310 & 316L as special order)
- Aluminum Type 1100-H14
- 3mm (.118) Diameter Mild Steed available as special order


Other Specifications

- Length of this style pin should exceed the thickness of the insulation, in order to securely attach the self-locking washer
- Nail point is standard - available with blunt end as special order

REGULAR POINT

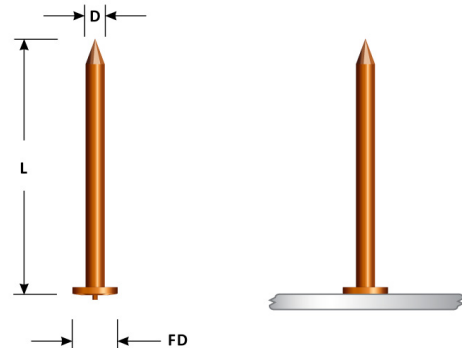

BLUNT-END

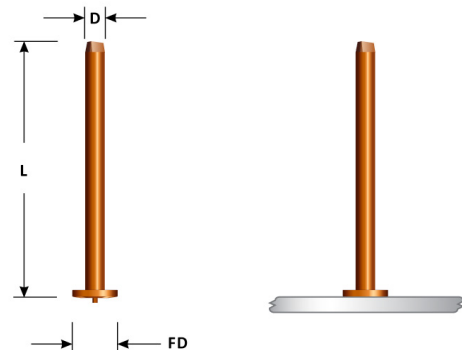

AGM Industries, Inc.
16 Jonathan Drive, Brockton, MA 02301



+01 508 587 3900



+01 508 587 3283



sales.agm@comcast.net



www.agmind.com