

# AGM

Holding the World's Insulation in Place

## CAPACITOR DISCHARGE WELD PINS

Weld pins are used for attaching insulation to various metals, with the use of a CD welder. After the pin is welded in place, the insulation is impaled on the pin and secured with a self-locking washer.

### Specifications

Diameter "D"	Flange Diameter (Steel) "FD"	Flange Diameter (Aluminum) "FD"	Length "L"
12 ga (.106)	.180	.235	As Required
10 ga (.135)	.218	.255	As Required


### Material

- Mild Steel, with Copper Coating
- Stainless Steel Type 302HG (Type 310 & 316L as special order)
- Aluminum Type 1100-H14
- 3mm (.118) Diameter Mild Steel available as special order


### Other Specifications

- Length of this style pin should exceed the thickness of the insulation, in order to securely attach the self-locking washer
- Nail point is standard - available with blunt end as special order

### REGULAR POINT

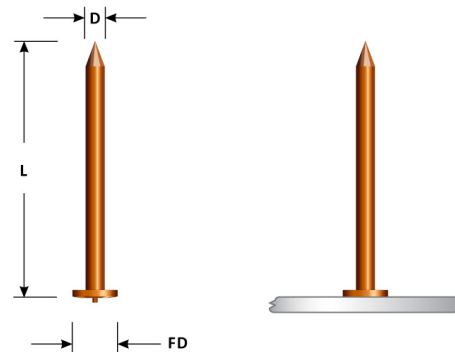

### BLUNT-END

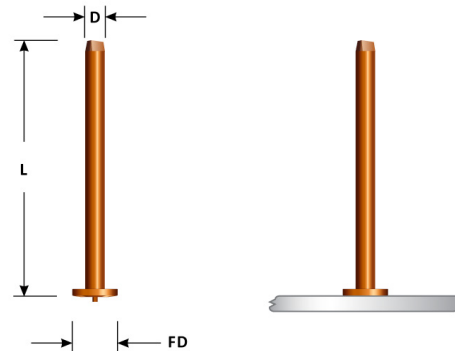

AGM Industries, Inc., 16 Jonathan Drive, Brockton, MA 02301

Phone: (508) 587-3900 | Fax: (508) 587-3283 | sales.agm@comcast.net | www.agmind.com