

AGM

Holding the World's Insulation in Place

J HOOKS

J Hooks are used to secure insulation to wire mesh. They can be tack and arc welded, or just hooked onto the mesh. After the hook is attached, the insulation is installed over the longer portion and held with a self-locking washer.

Specifications

Diameter:	10 ga (.135 dia) standard
	12 ga. (.106 dia) as special order


Material

- Available in mild steel (galvanized) or Stainless Steel Type 302HQ


Application

- Available with nail point or "blunt" end
- Used with self-locking washers

NAIL POINT

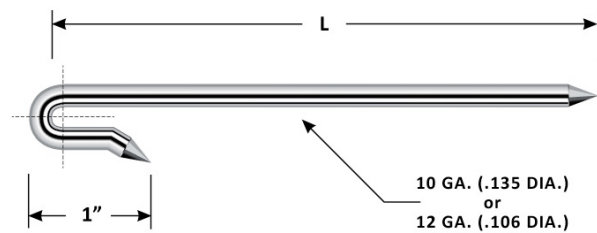

BLUNT END

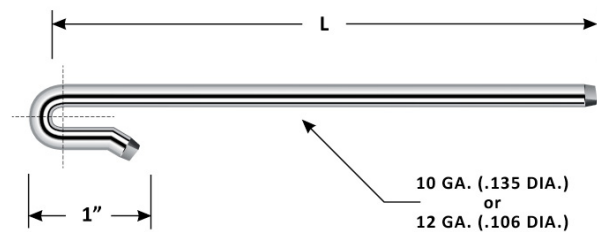

AGM Industries, Inc., 16 Jonathan Drive, Brockton, MA 02301

Phone: (508) 587-3900 | Fax: (508) 587-3283 | sales@agmind.com | www.agmind.com